


## UNINSULATED

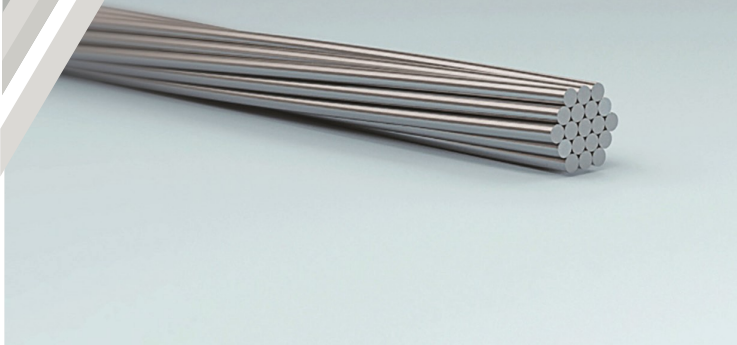

S

STANDARD GOST 3241-91, 3063-90


FOREIGN ANALOGUE

C GOST 3241-91 | 3063-90

**Cable (rope) twisted with steel wires.**

## APPLICATION

In coal mining, gas-and-oil producing industry, metallurgy, engineering, construction industry, sea and river transport. It can be used as lightning protection at high voltage lines.

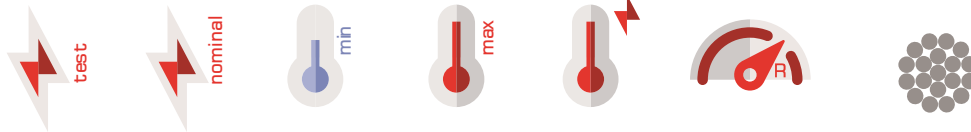

## CONSTRUCTION

Steel cable (rope) is made of galvanized steel wire (number of wires 19) twisted as single or in layers and is covered with anti-corrosive temperature resistant lubricant material.

## THE CONSTRUCTION LENGTH OF THE CABLE

agreed with the customer.  
Deviation from length is possible: up to 400m +5%, above 400m +20%.

**PACKING** On wooden drum or bundles (coils).

## LABELING

Label attached to wooden drum or bundle (coils).

## SERVICE LIFETIME

not less than 25 years

## WARRANTY PERIOD

2 years

## S GOST 3241-91, 3063-90

Part Name	Cross-Sectional area [mm <sup>2</sup> ]	Outer diameter [mm]	Tensile strength	Weight without lubricant [kg/km]
C-35	33,82	7,6	41650	270
C-40	38,46	8,1	44400	310
C-45	43,4	8,6	53550	350
C-50	48,64	9,1	59950	390
C-60	60,35	10	74450	485
C-70	72,92	11	89950	585



Uninsulated

Self-supporting

Mounting

Power

Control